


| REVISION HISTORY | | | | |
|-------------------|-----|---------------------|------------|----------|
| ZONE | REV | DESCRIPTION | DATE | APPROVED |
| FAN LEVEL | 1 | UL FAN MODULE | 7/06/2010 | P CH |
| MAIN FILTER LEVEL | 2 | METAL CLAMPS | 8/12/2011 | P CH |
| RIGHT SIDE | 3 | METAL SHOEBOX | 3/28/2012 | P CH |
| TOP COVER | 4 | UL FAN METAL MODULE | 12/14/2010 | P CH |

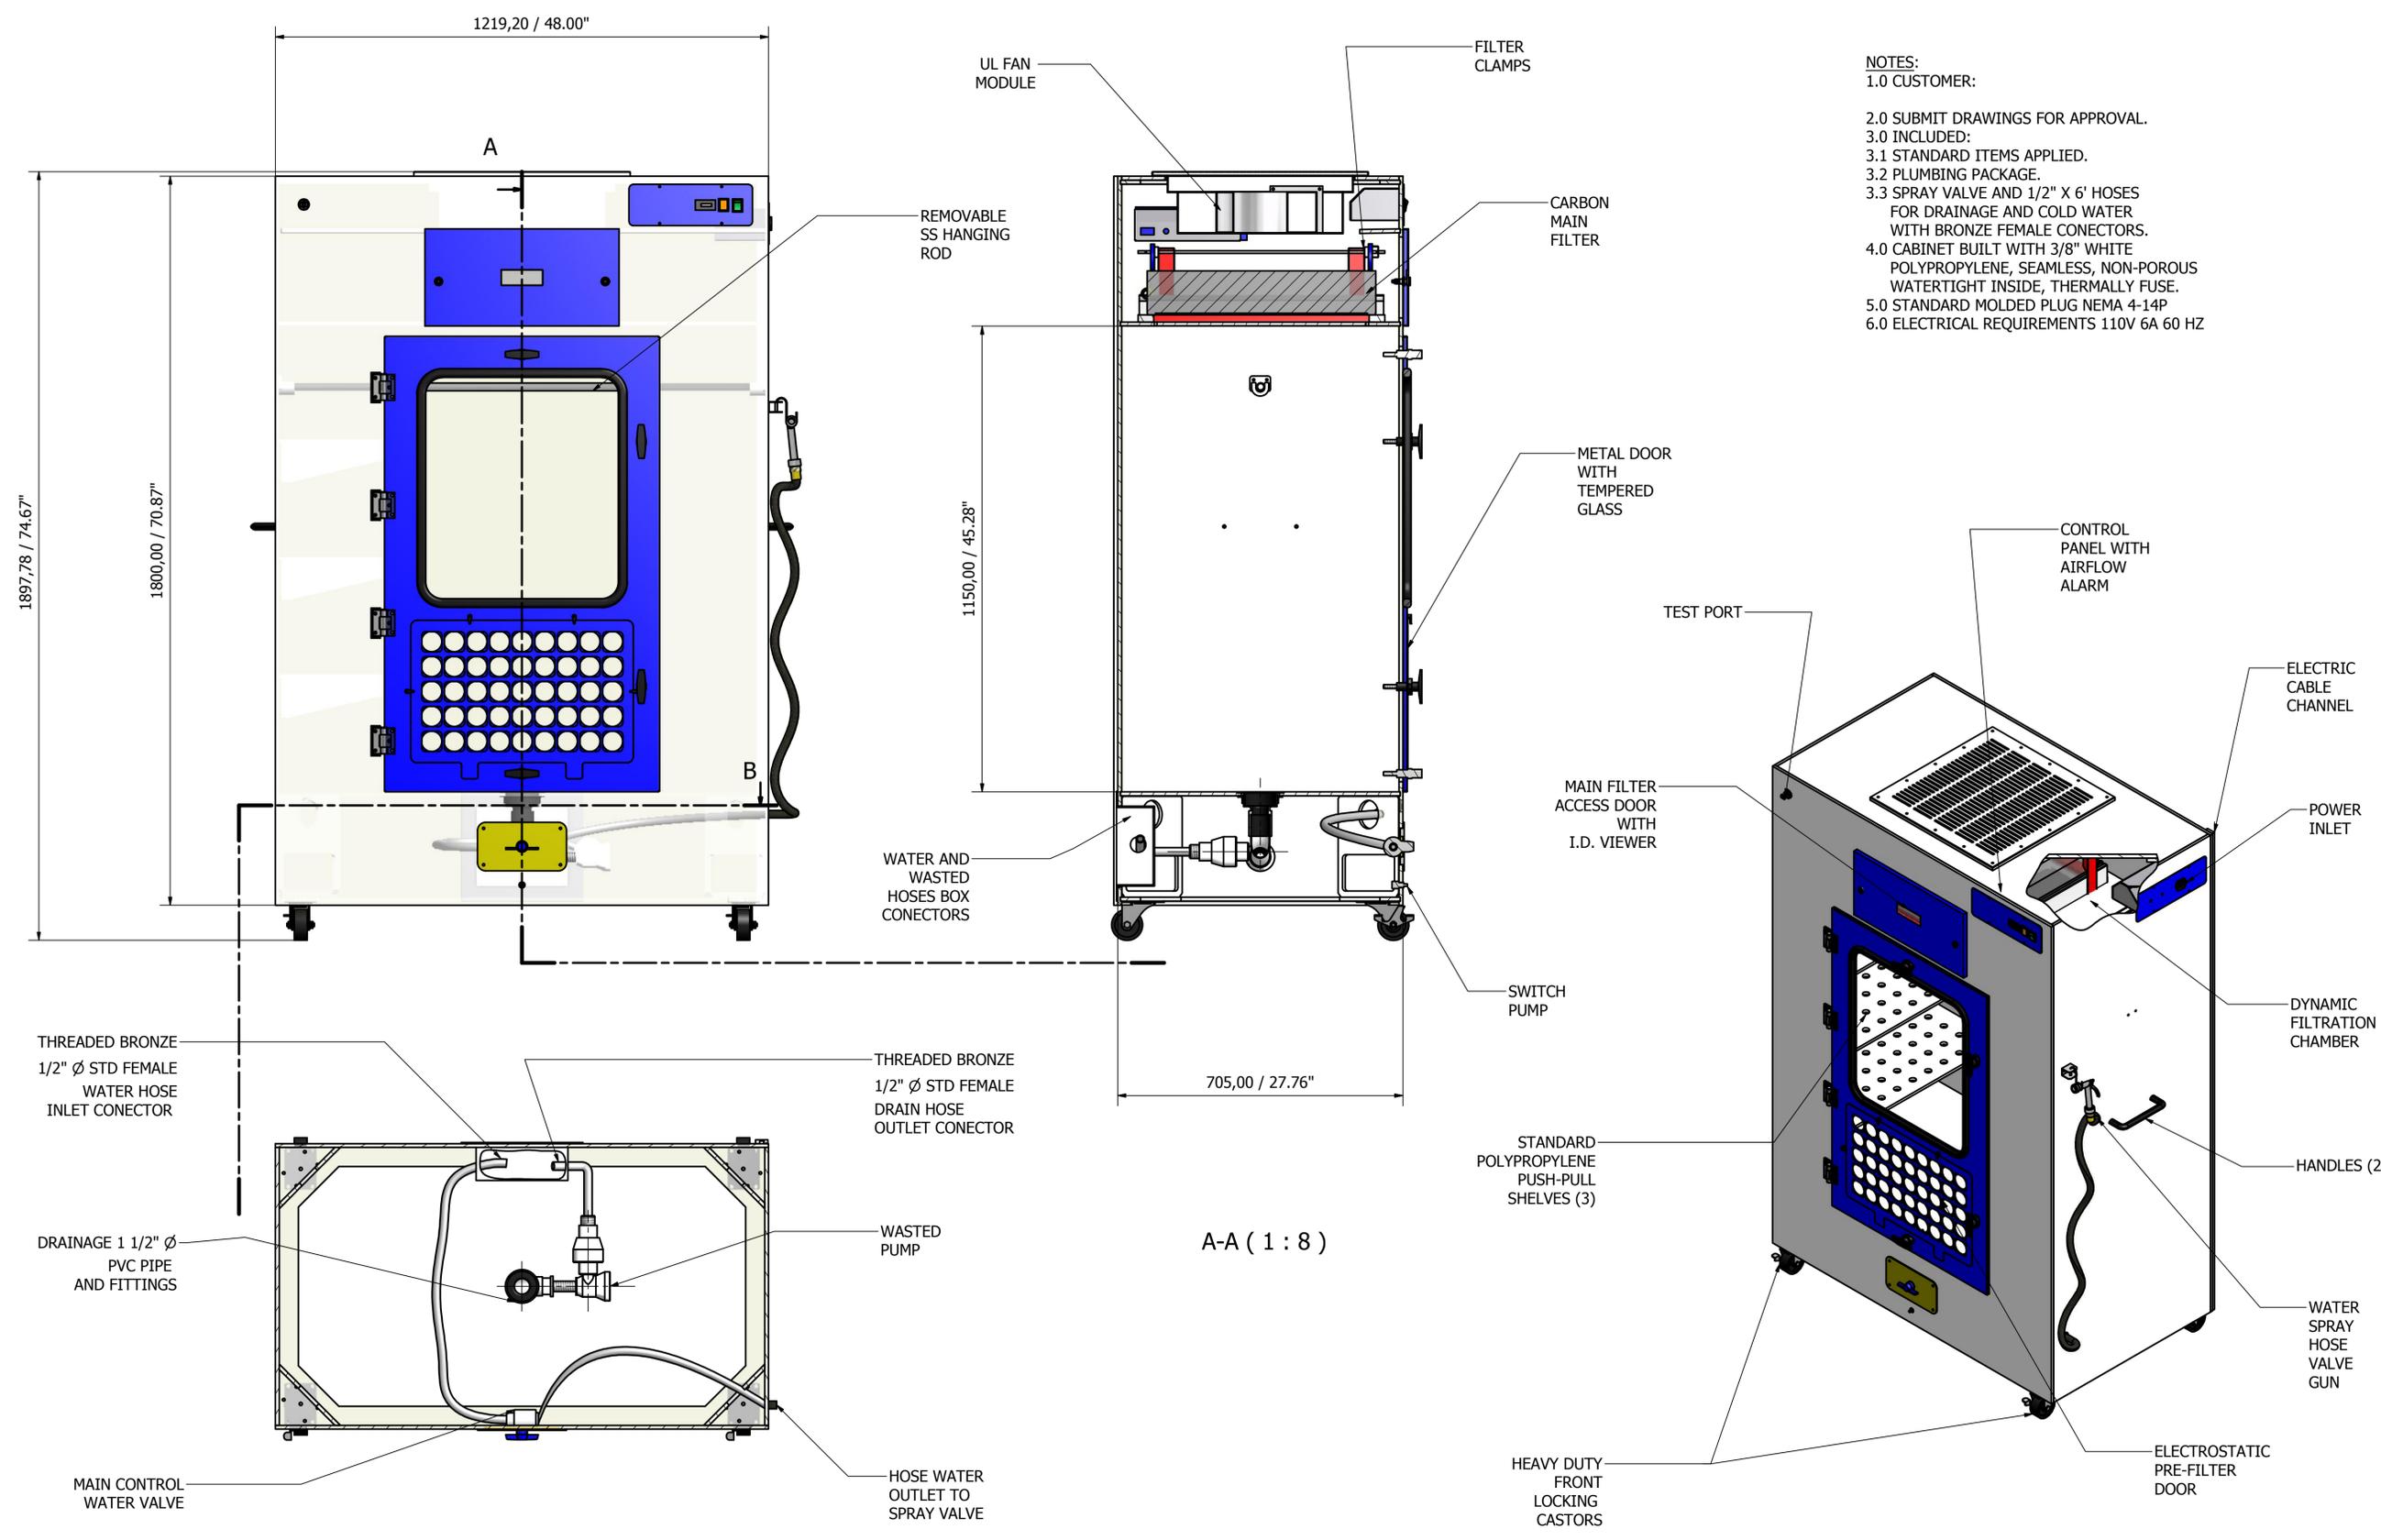

- NOTES:**
- 1.0 CUSTOMER:
 - 2.0 SUBMIT DRAWINGS FOR APPROVAL.
 - 3.0 INCLUDED:
 - 3.1 STANDARD ITEMS APPLIED.
 - 3.2 PLUMBING PACKAGE.
 - 3.3 SPRAY VALVE AND 1/2" X 6' HOSES FOR DRAINAGE AND COLD WATER WITH BRONZE FEMALE CONECTORS.
 - 4.0 CABINET BUILT WITH 3/8" WHITE POLYPROPYLENE, SEAMLESS, NON-POROUS WATERTIGHT INSIDE, THERMALLY FUSE.
 - 5.0 STANDARD MOLDED PLUG NEMA 4-14P
 - 6.0 ELECTRICAL REQUIREMENTS 110V 6A 60 HZ

A-A (1 : 8)

B-B (1 : 8)

| | | | | |
|--------------------|------------|-------------|------------------------|----------------|
| Designed by CFG | Checked by | Approved by | Date 12/14/2010 | Date |
| AIR SCIENCE USA | | | DC48UL.1800 SAFEKEEPER | |
| DC48UL-GAssem | | | Edition 4 | Sheet 1 / 2 |